

EFFER 210



2S

	6410	4300	2880	2165	kg
	2.67	4.40	6.50	8.60	m
2495 kg 5500 lb	14130	9475	6345	4770	lb
	8'9"	14'5"	21.3"	28'2"	ft

3S

	6180	4020	2660	1950	1580	kg
	2.67	4.48	6.58	8.68	10.78	m
2660 kg 5860 lb	13620	8860	5860	4295	3480	lb
	8'9"	14'8"	21'7"	28'5"	35'4"	ft

4S

	6000	3800	2440	1820	1415	1140	kg
	2.67	4.56	6.66	8.76	10.86	12.96	m
2795 kg 6160 lb	13225	8375	5375	4010	3115	2510	lb
	8'9"	14'11"	21'10"	28'8"	35'7"	42'6"	ft

5S

	5900	3635	2320	1660	1270	1030	880	kg
	2.67	4.63	6.73	8.83	10.93	13.03	15.13	m
2945 kg 6490 lb	13005	8010	5110	3655	2795	2270	1940	lb
	8'9"	15'2"	22'	28'11"	35'10"	42'8"	49'7"	ft


Standard





MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	18,94	400	2375	2485	990	5050 5700	18
3S	18,02	400	2375	2485	990	5050 5700	18
4S	17,32	400	2375	2485	990	5050 5700	18
5S	16,85	400	2375	2485	1160	5050 5700	18

MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	137040	400	94	98	39	199 224	39700
3S	130380	400	94	98	39	199 224	39700
4S	125320	400	94	98	39	199 224	39700
5S	121920	400	94	98	46	199 224	39700



6S

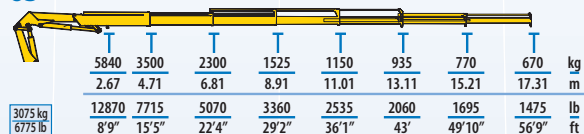



2S+JIB 2S

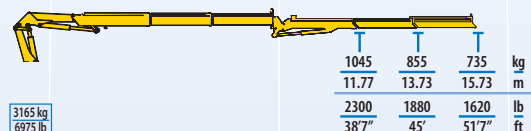

3S+JIB 2S

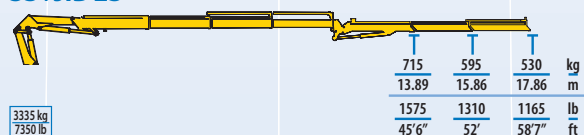

4S+JIB 2S

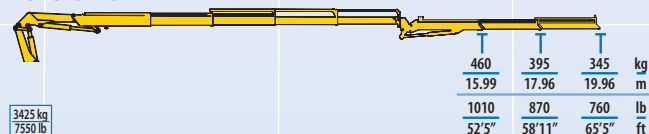

Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	16,49	400	2375	2485	1160	5050 5700	18
2S+JIB 2S	18,94	400	2540	2485	1080	5050 5700	18
3S+JIB 2S	18,02	400	2540	2485	1080	5050 5700	18
4S+JIB 2S	17,32	400	2540	2485	1080	5050 5700	18

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	119310	400	94	98	46	199 224	39700
2S+JIB 2S	137040	400	100	98	43	199 224	39700
3S+JIB 2S	130380	400	100	98	43	199 224	39700
4S+JIB 2S	125320	400	100	98	43	199 224	39700